

Essai gratuit
Créé par Paint 5

CHAIN HOIST

Lifting Equipment

Créé par Paint 5

Catalogue
2022/2023


SINCE 1982

JORHSON 

Essai gratuit
Créé par Paint 5

SHH-A

Electric Chain Hoist

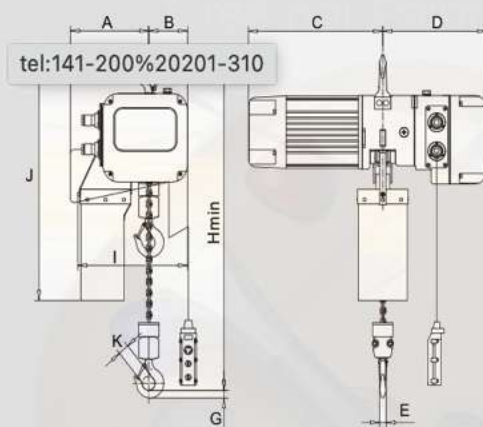

Technical Parameter


Model	Capacity	Classification FEM/ISO	Duty Rating %ED	Lifting Speed m/min	Lifting Motor Power Kw	Load Chain mm	Load Chain Falls	Net Weight kg
SHH-A003S1	250kg	2m/M5	50	7	0.9	Φ5x15	1	44
SHH-A003D1		33/17	7/2.3	0.9/0.3	52			
SHH-A003H1		1Am/M4	26/14	14/3.5	1.6/0.4			53
SHH-A005S1	500kg	2m/M5	50	7.6	0.9	Φ6.3x19	1	46
SHH-A005D1		33/17	7.6/2.5	0.9/0.3	54			
SHH-A005H1		1Am/M4	26/14	15/3.8	1.6/0.4			55
SHH-A010S1	1t	2m/M5	50	5	1.1	Φ8x24	1	50
SHH-A010D1		33/17	5/1.7	1.1/0.37	62			
SHH-A010H1		1Am/M4	26/14	10/2.5	2.2/0.55			61
SHH-A020S2	2t	2m/M5	50	2.5	1.1	Φ8x24	2	60
SHH-A020D2		33/17	2.5/0.9	1.1/0.37	73			
SHH-A020H2		1Am/M4	26/14	5/1.3	2.2/0.55			72
SHH-A020S1	2t	2m/M5	50	6.6	3.6	Φ10x30	1	100
SHH-A020D1		33/17	6.6/2.2	3.6/1.2	122			
SHH-A030S1	3t	2m/M5	50	6	3.6	Φ11.2x34	1	102
SHH-A030D1		33/17	6/2	3.6/1.2	124			
SHH-A050S2	5t	2m/M5	50	3	3.6	Φ11.2x34	2	124
SHH-A050D2		33/17	3/1	3.6/1.2	146			

Model	Capacity	Hmin	A	B	C	D	E	G	I	J	K
SHH-A003S1	250kg	400	200	102	302	307	18	22	295	610	27
SHH-A003D1	250kg	400	200	102	334	307	18	22	295	610	27
SHH-A003H1	250kg	400	200	102	354	307	18	22	295	610	27
SHH-A005S1	500kg	410	200	102	302	307	18	22	295	610	27
SHH-A005D1	500kg	410	200	102	334	307	18	22	295	610	27
SHH-A005H1	500kg	410	200	102	354	307	18	22	295	610	27
SHH-A010S1	1t	460	200	102	302	307	20	25	295	630	31
SHH-A010D1	1t	460	200	102	354	307	20	25	295	630	31
SHH-A010H1	1t	460	200	102	484	307	20	25	295	630	31
SHH-A020S2	2t	700	243	59	302	307	27	43	295	690	38
SHH-A020D2	2t	700	243	59	354	307	27	43	295	690	38
SHH-A020H2	2t	700	243	59	484	307	27	43	295	690	38
SHH-A020S1	2t	640	243	165	358	336	27	43	460	780	38
SHH-A020D1	2t	640	243	165	451	336	27	43	460	780	38
SHH-A030S1	3t	640	243	165	358	336	27	43	460	780	38
SHH-A030D1	3t	640	243	165	451	336	27	43	460	780	38
SHH-A050S2	5t	910	298	110	358	336	35	51	460	870	52
SHH-A050D2	5t	910	298	110	451	336	35	51	460	870	52

- beam flange request is for optional.
- single phase is for optional.
- above parameter is for 380V~415V/50HZ/3PH standard.

SHH-EC

Electric chain hoist with electric Trolley

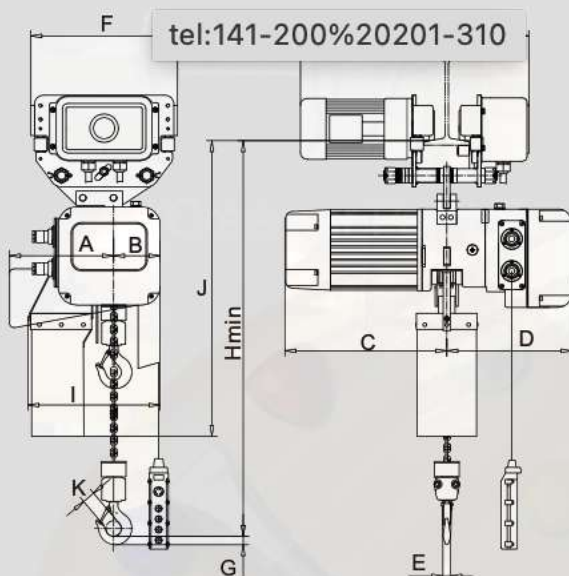

Technical Parameter

Model	Capacity	Classification FEM/ISO	Duty Rating %ED	Lifting Speed m/min	Lifting Motor Power Kw	Load Chain mm	Load Chain Falls	Traveling Speed m/min	Traveling Motor Power Kw	Beam Flange(mm)			Net Weight kg
										Standard	Optional		
SHH-EC003S1	250kg	2m/M5	50	7	0.9	Φ5x15	1	13.5	0.2	74-140	141-200	201-310	71
SHH-EC003D1			33/17	7/2.3	0.9/0.3			20/6.7	0.2/0.067				95
SHH-EC003H1		26/14	14/3.5	1.6/0.4	20/6.7			0.2/0.067	96				
SHH-EC005S1	500kg	2m/M5	50	7.6	0.9	Φ6.3x19	1	13.5	0.2	74-140	141-200	201-310	72
SHH-EC005D1			33/17	7.6/2.5	0.9/0.3			20/6.7	0.2/0.067				96
SHH-EC005H1		26/14	15/3.8	1.6/0.4	20/6.7			0.2/0.067	97				
SHH-EC010S1	1t	2m/M5	50	5	1.1	Φ8x24	1	13.5	0.2	74-140	141-200	201-310	76
SHH-EC010D1			33/17	5/1.7	1.1/0.37			20/6.7	0.2/0.067				100
SHH-EC010H1		26/14	10/2.5	2.2/0.55	20/6.7			0.2/0.067	99				
SHH-EC020S2	2t	2m/M5	50	2.5	1.1	Φ8x24	2	13.5	0.2	100-152	141-200	201-310	97
SHH-EC020D2			33/17	2.5/0.9	1.1/0.37			20/6.7	0.2/0.067				111
SHH-EC020H2		26/14	5/1.3	2.2/0.55	20/6.7			0.2/0.067	110				
SHH-EC020S1	2t	2m/M5	50	6.6	3.6	Φ10x30	1	13.5	0.2	100-152	141-200	201-310	152
SHH-EC020D1			33/17	6.6/2.2	3.6/1.2			20/6.7	0.2/0.067				178
SHH-EC030S1		26/14	10/2.5	2.2/0.55	20/6.7			0.2/0.067	178				
SHH-EC030D1	3t	2m/M5	50	6	3.6	Φ11.2x34	1	13.5	0.4	100-152	141-200	201-310	154
SHH-EC030H1			33/17	6/2	3.6/1.2			20/6.7	0.4/0.13				180
SHH-EC050S2		26/14	5/1.3	2.2/0.55	20/6.7			0.4/0.13	180				
SHH-EC050D2	5t	2m/M5	50	3	3.6	Φ11.2x34	2	13.5	0.4	100-152	141-200	201-310	192
SHH-EC050H2			33/17	3/1	3.6/1.2			20/6.7	0.4/0.13				222

Model	Capacity	Hmin	A	B	C	D	E	F	G	I	J	K	M	N
SHH-EC003S1	250kg	476	200	102	302	273	18	280	22	295	690	27	267	132
SHH-EC003D1	250kg	476	200	102	334	273	18	280	22	295	690	27	308	132
SHH-EC003H1	250kg	476	200	102	354	273	18	280	22	295	690	27	308	132
SHH-EC005S1	500kg	476	200	102	302	273	18	280	22	295	690	27	267	132
SHH-EC005D1	500kg	476	200	102	334	273	18	280	22	295	690	27	308	132
SHH-EC005H1	500kg	476	200	102	354	273	18	280	22	295	690	27	308	132
SHH-EC010S1	1t	506	200	102	302	273	20	280	25	295	690	31	267	132
SHH-EC010D1	1t	506	200	102	354	273	20	280	25	295	690	31	308	132
SHH-EC010H1	1t	506	200	102	484	273	20	280	25	295	690	31	308	132
SHH-EC020S2	2t	678	243	59	302	273	27	280	43	295	690	38	267	132
SHH-EC020D2	2t	678	243	59	354	273	27	280	43	295	690	38	308	132
SHH-EC020H2	2t	678	243	59	484	273	27	280	43	295	690	38	308	132
SHH-EC020S1	2t	670	243	165	358	336	27	280	43	460	810	38	267	132
SHH-EC020D1	2t	670	243	165	451	336	27	280	43	460	810	38	308	132
SHH-EC030S1	3t	670	243	165	358	336	27	386	43	460	810	38	297	139
SHH-EC030D1	3t	670	243	165	451	336	27	386	43	460	810	38	315	139
SHH-EC050S2	5t	890	298	110	358	336	35	426	51	460	830	52	299	140
SHH-EC050D2	5t	890	298	110	451	336	35	426	51	460	830	52	333	140


- beam flange request is for optional.
- single phase is for optional.
- above parameter is for 380V~415V/50HZ/3PH standard.

SHH-EC

Electric chain hoist with Plain Trolley



tel:141-200%20201-

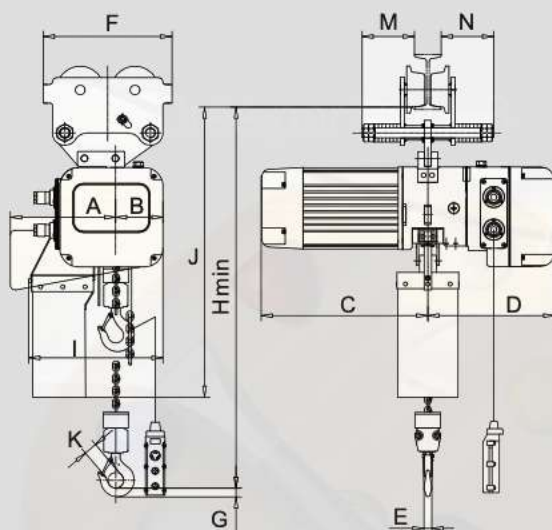

Technical Parameter


Model	Capacity	Classification FEM/ISO	Duty Rating %ED	Lifting Speed m/min	Lifting Motor Power Kw	Load Chain mm	Load Chain Falls	Beam Flange mm	Net Weight kg
SHH-T003S1	250kg	2m/M5	50	7	0.9	Φ5x15	1	68-180	60
SHH-T003D1			33/17	7/2.3	0.9/0.3				68
SHH-T003H1		1Am/M4	26/14	14/3.5	1.6/0.4				69
SHH-T005S1	500kg	2m/M5	50	7.6	0.9	Φ6.3x19	1	68-180	62
SHH-T005D1			33/17	7.6/2.5	0.9/0.3				70
SHH-T005H1		1Am/M4	26/14	15/3.8	1.6/0.4				71
SHH-T010S1	1t	2m/M5	50	5	1.1	Φ8x24	1	68-180	66
SHH-T010D1			33/17	5/1.7	1.1/0.37				78
SHH-T010H1		1Am/M4	26/14	10/2.5	2.2/0.55				77
SHH-T020S2	2t	2m/M5	50	2.5	1.1	Φ8x24	2	74-180	82
SHH-T020D2			33/17	2.5/0.9	1.1/0.37				95
SHH-T020H2		1Am/M4	26/14	5/1.3	2.2/0.55				94
SHH-T020S1	2t	2m/M5	50	6.6	3.6	Φ10x30	1	74-180	136
SHH-T020D1			33/17	6.6/2.2	3.6/1.2				158
SHH-T030S1		2m/M5	50	6	3.6				138
SHH-T030D1	3t		33/17	6/2	3.6/1.2	Φ11.2x34	1	74-180	160
SHH-T050S2		2m/M5	50	3	3.6				182
SHH-T050D2			33/17	3/1	3.6/1.2				204

Model	Capacity	Hmin	A	B	C	D	E	F	G	I	J	K	M	N
SHH-T003S1	250kg	450	200	102	302	307	18	273	22	295	660	27	115	115
SHH-T003D1	250kg	450	200	102	334	307	18	273	22	295	660	27	115	115
SHH-T003H1	250kg	450	200	102	354	307	18	273	22	295	660	27	115	115
SHH-T005S1	500kg	450	200	102	302	307	18	273	22	295	660	27	115	115
SHH-T005D1	500kg	450	200	102	334	307	18	273	22	295	660	27	115	115
SHH-T005H1	500kg	450	200	102	354	307	18	273	22	295	660	27	115	115
SHH-T010S1	1t	480	200	102	302	307	20	273	25	295	660	31	105	105
SHH-T010D1	1t	480	200	102	354	307	20	273	25	295	660	31	105	105
SHH-T010H1	1t	480	200	102	484	307	20	273	25	295	660	31	105	105
SHH-T020S2	2t	665	243	59	302	307	27	303	43	295	660	38	104	104
SHH-T020D2	2t	665	243	59	354	307	27	303	43	295	660	38	104	104
SHH-T020H2	2t	665	243	59	484	307	27	303	43	295	660	38	104	104
SHH-T020S1	2t	650	243	165	358	336	27	363	43	460	770	38	109	109
SHH-T020D1	2t	650	243	165	451	336	27	363	43	460	770	38	109	109
SHH-T030S1	3t	650	243	165	358	336	27	363	43	460	770	38	109	109
SHH-T030D1	3t	650	243	165	451	336	27	363	43	460	770	38	109	109
SHH-T050S2	5t	880	298	110	358	336	35	436	51	460	820	52	110	110
SHH-T050D2	5t	880	298	110	451	336	35	436	51	460	820	52	110	110

- beam flange request is for optional.
- single phase is for optional.
- above parameter is for 380V~415V/50HZ/3PH standard.

SHH-L

Electric Chain hoist with Geared Trolley

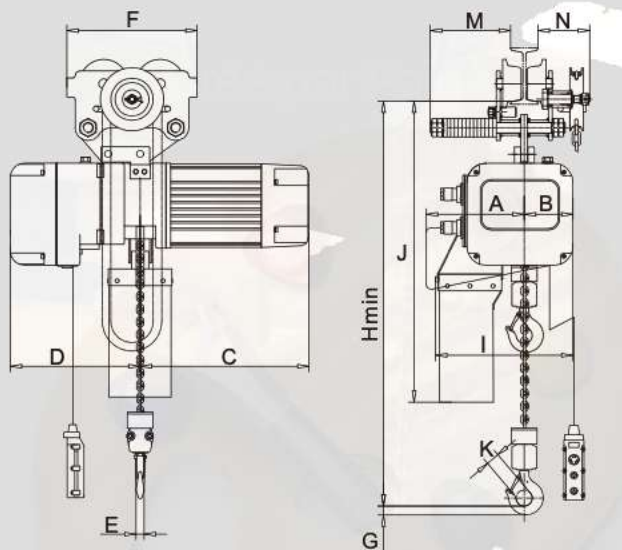

Technical Parameter


Model	Capacity	Classification FEM/ISO	Duty Rating %ED	Lifting Speed m/min	Lifting Motor Power Kw	Load Chain mm	Load Chain Falls	Hand Chain mm	Beam Flange mm	Net Weight kg
SHH-L003S1	250kg	2m/M5	50	7	0.9	Φ5x15	1	Φ5x23.7	68-180	66
SHH-L003D1		1Am/M4	33/17	7/2.3	0.9/0.3					74
SHH-L003H1		26/14	14/3.5	1.6/0.4	75					
SHH-L005S1	500kg	2m/M5	50	7.6	0.9	Φ6.3x19	1	Φ5x23.7	68-180	68
SHH-L005D1		1Am/M4	33/17	7.6/2.5	0.9/0.3					76
SHH-L005H1		26/14	15/3.8	1.6/0.4	77					
SHH-L010S1	1t	2m/M5	50	5	1.1	Φ8x24	1	Φ5x23.7	68-180	72
SHH-L010D1		1Am/M4	33/17	5/1.7	1.1/0.37					84
SHH-L010H1		26/14	10/2.5	2.2/0.55	83					
SHH-L020S2	2t	2m/M5	50	2.5	1.1	Φ8x24	2	Φ5x23.7	74-180	88
SHH-L020D2		1Am/M4	33/17	2.5/0.9	1.1/0.37					100
SHH-L020H2		26/14	5/1.3	2.2/0.55	99					
SHH-L020S1	2t	2m/M5	50	6.6	3.6	Φ10x30	1	Φ5x23.7	74-180	143
SHH-L020D1		1Am/M4	33/17	6.6/2.2	3.6/1.2					165
SHH-L030S1		2m/M5	50	6	3.6					145
SHH-L030D1	3t	2m/M5	33/17	6/2	3.6/1.2	Φ11.2x34	1	Φ5x23.7	74-180	167
SHH-L050S2		50	3	3.6	189					
SHH-L050D2	33/17	3/1	3.6/1.2	211						

Model	Capacity	Hmin	A	B	C	D	E	F	G	I	J	K	M	N
SHH-L003S1	250kg	450	200	102	302	307	18	273	22	295	660	27	185	105
SHH-L003D1	250kg	450	200	102	334	307	18	273	22	295	660	27	185	105
SHH-L003H1	250kg	450	200	102	354	307	18	273	22	295	660	27	185	105
SHH-L005S1	500kg	450	200	102	302	307	18	273	22	295	660	27	185	105
SHH-L005D1	500kg	450	200	102	334	307	18	273	22	295	660	27	185	105
SHH-L005H1	500kg	450	200	102	354	307	18	273	22	295	660	27	185	105
SHH-L010S1	1t	480	200	102	302	307	20	273	25	295	660	31	160	103
SHH-L010D1	1t	480	200	102	354	307	20	273	25	295	660	31	160	103
SHH-L010H1	1t	480	200	102	484	307	20	273	25	295	660	31	160	103
SHH-L020S2	2t	665	243	59	302	307	27	303	43	295	660	38	155	132
SHH-L020D2	2t	665	243	59	354	307	27	303	43	295	660	38	155	132
SHH-L020H2	2t	665	243	59	484	307	27	303	43	295	660	38	155	132
SHH-L020S1	2t	650	243	165	358	336	27	363	43	460	770	38	157	138
SHH-L020D1	2t	650	243	165	451	336	27	363	43	460	770	38	157	138
SHH-L030S1	3t	650	243	165	358	336	27	363	43	460	770	38	157	138
SHH-L030D1	3t	650	243	165	451	336	27	363	43	460	770	38	157	138
SHH-L050S2	5t	880	298	110	358	336	35	436	51	460	820	52	163	139
SHH-L050D2	5t	880	298	110	451	336	35	436	51	460	820	52	163	139

- beam flange request is for optional.
- single phase is for optional.
- above parameter is for 380V~415V/50HZ/3PH standard.

SHK-A

Electric Chain Hoist

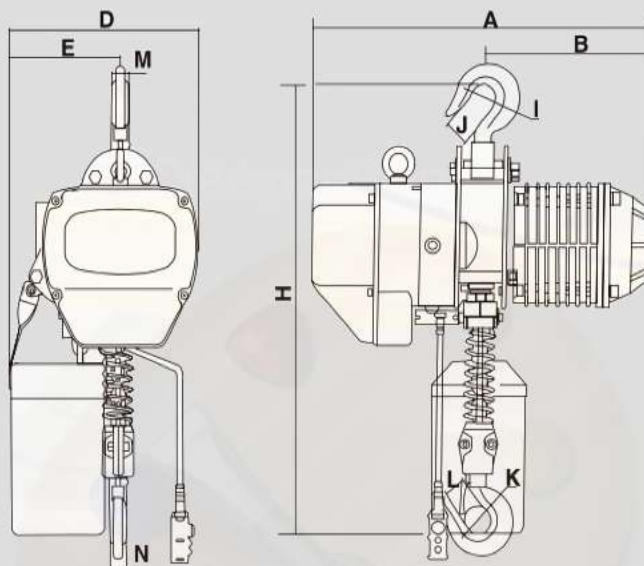

Technical Parameter


Model	Capacity	Classification FEM/ISO	Duty Rating %ED	Lifting Speed m/min	Lifting Motor Power Kw	Load Chain mm	Load Chain Falls	Net Weight kg
SHK-A005S1	500kg	1Am/M4	30	7.2	1.1	6.3	1	47
SHK-A005D1			20/10	7.2/2.4	1.1/0.37			54
SHK-A010S1	1t	1Am/M4	30	6.8	1.5	7.1	1	65
SHK-A010D1			20/10	6.8/2.3	1.5/0.5			75
SHK-A020S2	2t	1Am/M4	30	3.4	1.5	7.1	2	73
SHK-A020D2			20/10	3.4/1.1	1.5/0.5			83
SHK-A020S1	2t	1Am/M4	30	6.6	3.0	10	1	108
SHK-A020D1			20/10	6.6/2.2	3.0/1.0			128
SHK-A030S2	3t	1Am/M4	30	3.3	3.0	10	2	131
SHK-A030D2			20/10	3.3/1.1	3.0/1.0			151
SHK-A030S1	3t	1Am/M4	30	5.6	3.0	11.2	1	115
SHK-A030D1			20/10	5.6/1.8	3.0/1.0			135
SHK-A050S2	5t	1Am/M4	30	2.8	3.0	11.2	2	145
SHK-A050D2			20/10	2.8/0.9	3.0/1.0			165

Model	Capacity	Hmin	A	B	D	E	I	J	K	L	M	N
SHK-A005S1	500kg	530	460	230	288	165	31	29	31	29	20	20
SHK-A005D1			545	260								
SHK-A010S1	1t	650	520	260	300	176	42	32	42	32	24	24
SHK-A010D1			582	280								
SHK-A020S2	2t	835	520	260	300	236	49	40	49	40	30	30
SHK-A020D2			582	280								
SHK-A020S1	2t	800	615	295	430	265	49	40	49	40	30	30
SHK-A020D1			670	313								
SHK-A030S2	3t	950	615	295	430	320	59	48	59	48	35	35
SHK-A030D2			670	313								
SHK-A030S1	3t	845	615	295	430	265	59	48	59	48	35	35
SHK-A030D1			670	313								
SHK-A050S2	5t	1030	615	295	430	325	60	48	60	48	43	43
SHK-A050D2			670	313								

- beam flange request is for optional.
- single phase is for optional.
- above parameter is for 380V~415V/50HZ/3PH standard.

SHK-AM

Electric Chain Hoist with Electric Trolley

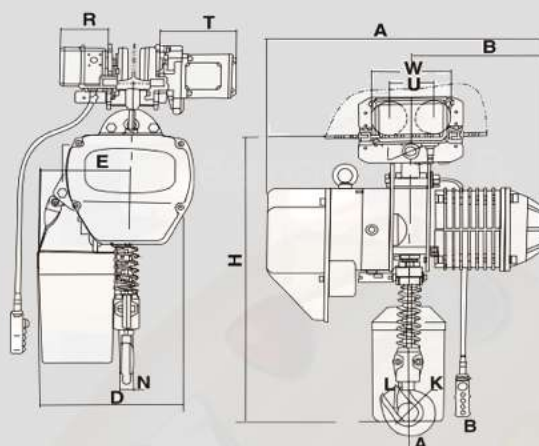

Technical Parameter


Model	Capacity	Classification FEM/ISO	Duty Rating %ED	Lifting Speed m/min	Lifting Motor Power Kw	Traveling Speed m/min	Traveling Motor Power Kw	Beam Flange mm	Load Chain mm	Load Chain Falls	Net Weight kg
SHK-AM005S1	500kg	1Am/M4	30	7.2	1.1	11	0.4	75 - 178	6.3	1	83
SHK-AM005D1			20/10	7.2/2.4	1.1/0.37						90
SHK-AM010S1	1t	1Am/M4	30	6.8	1.5	11	0.4	75 - 178	7.1	1	101
SHK-AM010D1			20/10	6.8/2.3	1.5/0.5						111
SHK-AM020S2	2t	1Am/M4	30	3.4	1.5	11	0.4	82 - 178	7.1	2	116
SHK-AM020D2			20/10	3.4/1.1	1.5/0.5						126
SHK-AM020S1	2t	1Am/M4	30	6.6	3.0	11	0.4	82 - 178	10	1	153
SHK-AM020D1			20/10	6.6/2.2	3.0/1.0						171
SHK-AM030S2	3t	1Am/M4	30	3.3	3.0	11	0.75	100 - 178	10	2	205
SHK-AM030D2			20/10	3.3/1.1	3.0/1.0						225
SHK-AM030S1	3t	1Am/M4	30	5.6	3.0	11	0.75	100 - 178	11.2	1	189
SHK-AM030D1			20/10	5.6/1.8	3.0/1.0						209
SHK-AM050S2	5t	1Am/M4	30	2.8	3.0	11	0.75	112 - 178	11.2	2	221
SHK-AM050D2			20/10	2.8/0.9	3.0/1.0						241

Model	Capacity	Hmin	A	B	D	E	I	K	L	N	W	U	R	T
SHK-AM005S1	500kg	635	460	230	288	165	31	31	29	20	180	100	140	159
SHK-AM005D1			545	260										
SHK-AM010S1	1t	650	520	260	300	176	31	42	32	24	207	113	142	231
SHK-AM010D1			582	260										
SHK-AM020S2	2t	815	520	260	300	236	36	49	40	30	237	127	142	231
SHK-AM020D2			582	280										
SHK-AM020S1	2t	770	615	295	430	265	36	49	40	30	237	127	142	231
SHK-AM020D1			670	313										
SHK-AM030S2	3t	930	615	295	430	320	43	59	48	35	265	140	142	231
SHK-AM030D2			670	313										
SHK-AM030S1	3t	830	615	295	430	265	43	59	48	35	265	140	142	231
SHK-AM030D1			670	313										
SHK-AM050S2	5t	1015	615	295	430	325	54	60	48	43	296	156	142	231
SHK-AM050D2			670	313										

- beam flange request is for optional.
- single phase is for optional.
- above parameter is for 380V~415V/50HZ/3PH standard.

SHK-D

Low-headroom Electric Chain Hoist

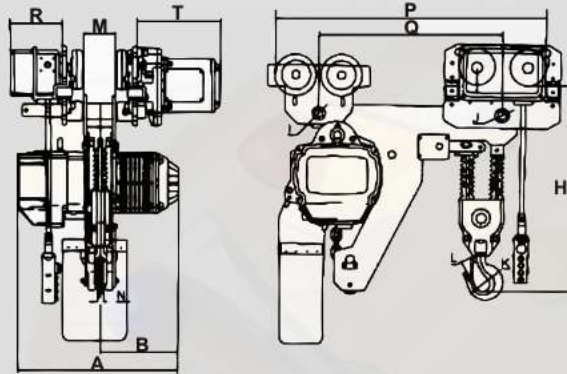

Technical Parameter

Model	Capacity	Classification FEM/ISO	Duty Rating %ED	Lifting Speed m/min	Lifting Motor Power Kw	Traveling Speed m/min	Traveling Motor Power Kw	Beam Flange mm	Load Chain mm	Load Chain Falls	Net Weight kg
SHK-D005S1	500kg	1Am/M4	30	7.2	1.1	11	0.4	75-125	6.3	1	83
SHK-D005D1			20/10	7.2/2.4	1.1/0.37						90
SHK-D010S1	1t	1Am/M4	30	6.8	1.5	11	0.4	75-178	7.1	1	101
SHK-D010D1			20/10	6.8/2.3	1.5/0.5						111
SHK-D020S2	2t	1Am/M4	30	3.4	1.5	11	0.4	82-178	7.1	2	116
SHK-D020D2			20/10	3.4/1.1	1.5/0.5						126
SHK-D020S1	2t	1Am/M4	30	6.6	3.0	11	0.4	82-178	10	1	153
SHK-D020D1			20/10	6.6/2.2	3.0/1.0						171
SHK-D030S2	3t	1Am/M4	30	3.3	3.0	11	0.75	100-178	10	2	205
SHK-D030D2			20/10	3.3/1.1	3.0/1.0						225
SHK-D030S1	3t	1Am/M4	30	5.6	3.0	11	0.75	100-178	11.2	1	189
SHK-D030D1			20/10	5.6/1.8	3.0/1.0						209
SHK-D050S2	5t	1Am/M4	30	2.8	3.0	11	0.75	112-178	11.2	2	221
SHK-D050D2			20/10	2.8/0.9	3.0/1.0						241

Model	Capacity	Hmin	A	B	P	Q	I	J	R	M	T
SHK-D005S1	500kg	440	460	230	585	400	Φ27	Φ31	142	49	231
SHK-D005D1			545	260							
SHK-D010S1	1t	480	520	260	630	445	Φ27	Φ31	142	56	231
SHK-D010D1			582	280							
SHK-D020S2	2t	570	520	260	720	505	Φ31	Φ36	142	66	231
SHK-D020D2			582	280							
SHK-D020S1	2t	535	615	295	665	444.5	Φ31	Φ36	142	56	231
SHK-D020D1			670	313							
SHK-D030S2	3t	640	615	295	775	526	Φ36	Φ43	142	73	231
SHK-D030D2			670	313							
SHK-D030S1	3t	685	615	295	750	503	Φ36	Φ43	142	66	231
SHK-D030D1			670	313							
SHK-D050S2	5t	740	615	295	825	541	Φ43	Φ54	142	73	231
SHK-D050D2			670	313							

- beam flange request is for optional.
- single phase is for optional.
- above parameter is for 380V~415V/50HZ/3PH standard.